

ACTIVA TWIN 15A

/ The multi-circuit battery charging system



/ This battery charging system is ideal for installation in a vehicle to ensure that the vehicle will be ready for action right away, even when it has been standing for a long time. The Activa Twin has two charging circuits, enabling several batteries of different capacities to be charged. Its intelligent electronic system monitors the charging processes, evens out differing charge states when batteries are connected in series and prevents premature failure due to unbalanced charging. The pre-programmed charging characteristic guarantees the correct charging current for the capacity and condition of the battery.

PRODUCT INFORMATION

- / Based on Active Inverter Technology
- / Universal - for all batteries: conventional lead acid, lead calcium/silver or sealant type (AGM, MF) batteries, and maintenance-free lead gel batteries.
- / Automatic 12 V / 24 V battery voltage detection
- / Charge status, fault and start/stop are indicated on the LED display
- / Plug-in charging and mains cables
- / Highly efficient cooling system ensures stable operation
- / Both battery and vehicle are 100% safe thanks to short-circuit protection, active reverse polarity protection, active mains voltage monitoring, automatic open circuit voltage detection (when changing a battery) plus charge phase monitoring (for faulty battery)
- / Charging of deeply discharged batteries possible
- / Up to 96% energy efficiency

OPTIONS

- / FireCAN communication interfaces and a floating contact are used to transfer data between the battery charging system and the vehicle's electronic system; these are active in drive, standby and charge modes. The FireCAN option transmits device status and battery voltage, and can detect the following problems: reverse polarity, short circuit, battery error, charging error. The integrated error memory stores the ten most recently encountered errors.
- / The temperature-controlled charging option reduces water consumption and increases battery service life.
- / USB interface for updating battery charging system software.




APPLICATION AREAS

Emergency vehicles, commercial vehicles, boats, caravans, etc.




APPLICATIONS

/ When setting up a 24 V vehicle electrical supply from two 12 V batteries connected in series, the Acctiva Twin ensures



that different charge statuses are evened out even if different loads are placed on the two batteries by 12 V and 24 V consumers.

/ The Acctiva Twin can also be used with different battery combinations:

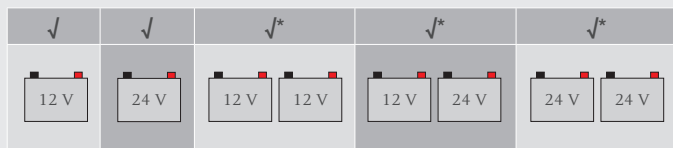

* With these battery combinations, different charge states cannot be evened out, and the batteries can be charged in sequence.

TECHNICAL DATA TWIN 15A

Charging current	15 A
Battery capacity	50 – 300 Ah
Battery voltage	12 V / 24 V
Mains voltage +/- 15%	230 V
Charging characteristic	IUoU (with pulse charge conservation)
Degree of protection	IP 40 (horizontal) / IP 44 (vertical)
Dimensions (L x W x H)	247 x 184 x 88mm / 9,72 x 7,24 x 3,46 in.
Weight	2,26kg / 4,98 lb.
Marks of conformity	CE, ECE
Mains fuse protection	16 A
EMC emissions class	B

Text and images correspond to the current state of technology at the time of printing. Subject to modifications. All information is without guarantee in spite of careful editing - liability excluded. Copyright © 2011 Fronius™. All rights reserved.

/ Battery Charging Systems / Welding Technology / Solar Electronics

WE HAVE THREE DIVISIONS AND ONE PASSION: SHIFTING THE LIMITS.

/ Whether Battery Charging Systems, Welding Technology or Solar Electronics - our goal is clearly defined: to be the technology and quality leader. With more than 3,000 employees worldwide, we shift the limits of what's possible - our 737 active patents are testimony to this. While others progress step by step, we innovate in leaps and bounds. Further information about all Fronius products and our global sales partners and representatives can be found at www.fronius.com



v02 2011 EN

Fronius UK Limited
Maidstone Road, Kingston
Milton Keynes, MK10 0BD
United Kingdom
Telephone +44 1908 512 300
Fax +44 1908 512 329
charger.sales.uk@fronius.com
www.fronius.co.uk

Fronius International GmbH
Froniusplatz 1
4600 Wels
Österreich
Telefon +43 7242 241-0
Telefax +43 7242 241-952560
battery.chargers@fronius.com
www.fronius.com

v01 2012 EN ab09